




PIERSANTI[®]

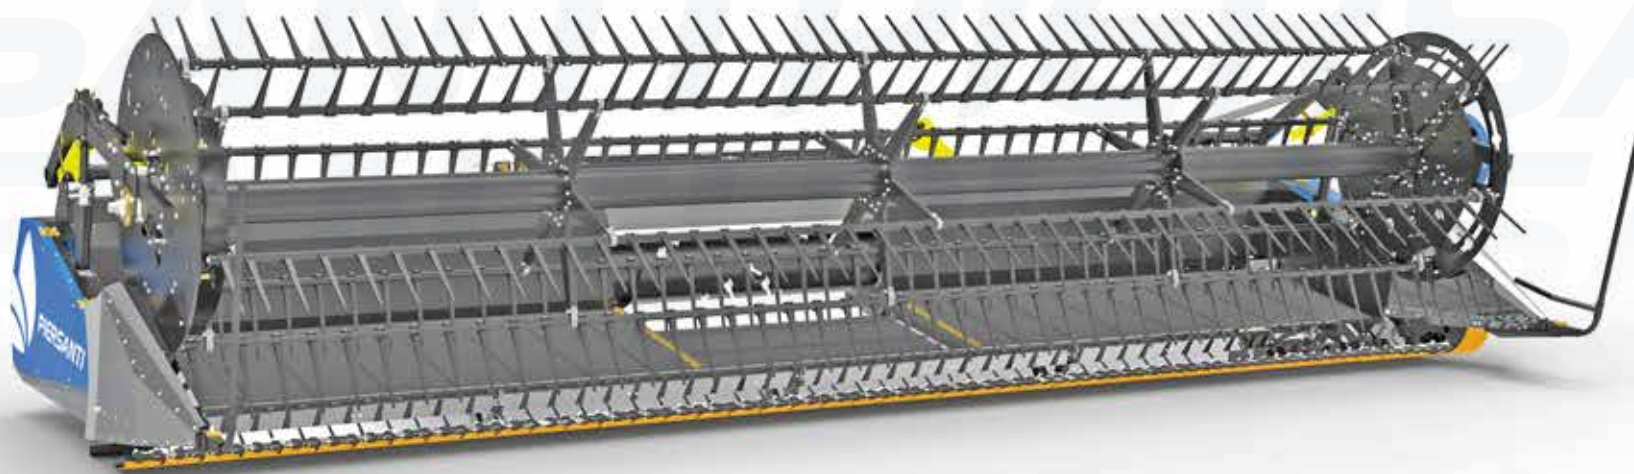

DRAPER DF-1000

#GoodHarvests



www.piersanti.com.ar

DF-1000

15 - 17 - 19 - 21 - 23 - 25 feet

DOUBLE PURPOSE

HARVESTING AND SWATHING

BENEFITS

- More even and uniform feeding from the header to the harvester.
- Reduction in losses from the platform.
- Up to 20% reduction in fuel consumption.
- Better crop handling.
- High harvester performance: produces more tons of harvested grains per hour than with a conventional header.
- Extension of working hours by up to 3 hours.
- Increases the lifespan of internal components of the harvester due to less wear.
- Low maintenance cost.

DIMENSIONS

FEET	CUTTING WITDH	TOTAL WITDH	TRANSPORT WITDH	WEIGHTH
15 FEET	4572 mm.	4900 mm.	2550 mm.	1705 Kg.
17 FEET	5185 mm.	5510 mm.	2550 mm.	1930 Kg.
19 FEET	5800 mm.	6125 mm.	2550 mm.	2150 Kg.
21 FEET	6400 mm.	6725 mm.	2550 mm.	2350 Kg.
23 FEET	7000 mm.	7325 mm.	2550 mm.	2600 Kg.
25 FEET	7600 mm.	7925 mm.	2550 mm.	2825 Kg.



Soybean



Wheat



Rice



Beans



Legumes

TECHNICAL CHARACTERISTICS


- Draper system with fixed belts and flexible, floating cutting bar, which provides greater durability of the drapers by preventing dirt from entering the belts.
- Orbital reel that contributes to the uniform and smooth delivery of the material.
- Transport trailer with a two-axle structure and dual tires.
- Adjustment of the cutting angle of the platform through hydraulic cylinders regulated from the harvester cabin.
- Mechanical drive of the side drapers through gearboxes in an oil bath.
- Feeder auger with a four- discs slip clutch.



HIGHLIGHTED CHARACTERISTICS



- **Cutting bar:** Flexible
- **Sickle drive:** V-belt driven on the left side.
- **Standard cutting system:** 3" (76.2 mm).

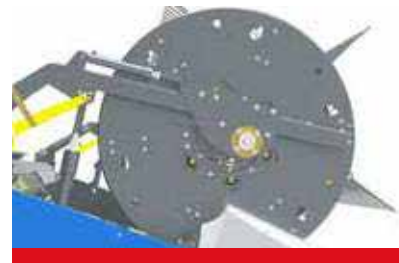

- **Eccentric orbital reel** driven by a hydraulic motor and polyamide tines.
- **Optional:** Cam-driven orbital reel with steel tines.



- **Adaptor kit** for different harvester brands and models.
- **Adjustment of the header's attack angle** through hydraulic cylinders.
- **Optional:** long crops auger.



- **Ground coping system: Wi-Fi Box system** controlled by a wireless screen in the cabin for setting the attack angle and turning on nighttime work lights.



Tomás Araus 548
Tel. +54 9 (03472) 470195 - 470777
(2563) Noetinger - Córdoba
Argentina

ventas@piersanti.com.ar
www.piersanti.com.ar



#GoodHarvest